

# AUTOMAG - DINO

STRETCHHOOD PACKAGING MACHINE



---


**Patented European Design**

---




**"AUTOMAG - DINO Stretchhood"** is a real game changer.  
It is by far the best choice in case of pallet stabilization.  
**Compact. Cheaper. Faster. Better & more Sustainable.**

**Main advantages of the Stretchhood over other pallet packaging techniques -**




Up to  
180 pallet  
per hour



Firmer  
packaging



Dust and  
waterproof



Saving  
energy



Pneumatics /  
Hydraulics

**Salient Features :**

- Huge energy savings by elimination of pneumatics and hydraulics
- Lower construction height and floor space required
- Intelligent design - minimum maintenance due to minimum movements
- The design allows for simultaneous preparation and application of the Stretchhood, thus reducing the cycle time which results in the increase of the machine's capacity (pallet / hour)
- Stretch hood holds force on to the product and never sticks to your product.





## AUTOMAG - DINO

### DINO's Standards

- 120 pallet / hour
- Pallets in the range of 800 x 1200mm, 1000 x 1200mm, 1140 x 1140mm, 1100 x 1300mm

### Components


Dino is built up with A-class components from premium brands. All the component brands that have been used have global service and excel in their work field.

### Optional

- Second film unit
- Capacity up to 180 pallet / hour
- Separate control unit
- Maintenance contracts

### Sustainable innovative design

- No pneumatics or hydraulics are used in the machine. By excluding these energy-consuming techniques, energy consumption is kept to an absolute minimum.
- DINO Stretchhood brings stability to all products

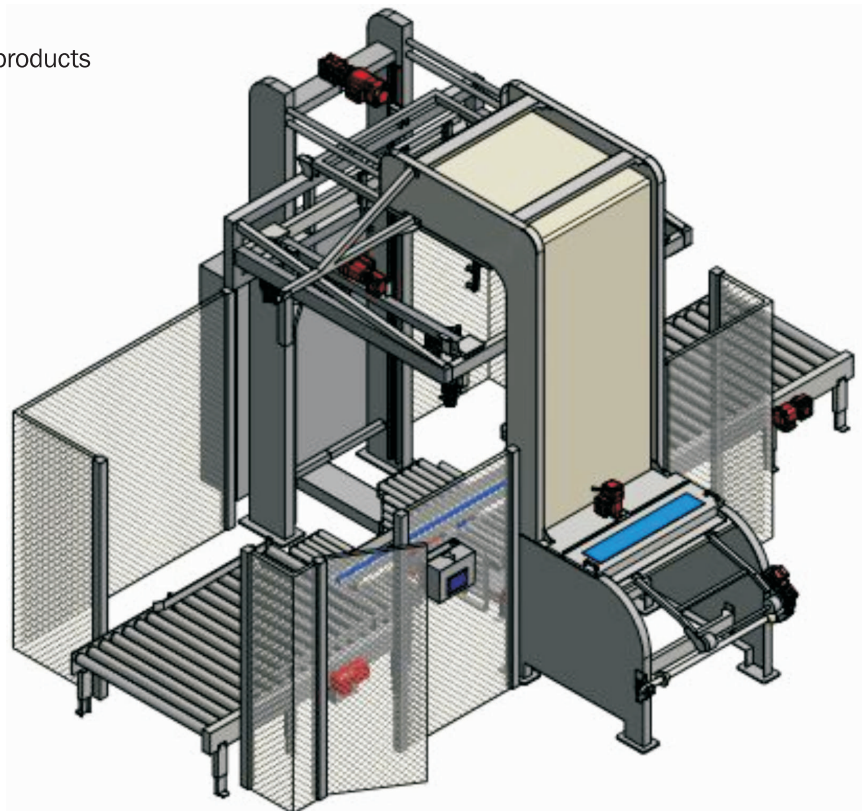

## Technical specification :

### Dino

Length	2660mm
Width	5085mm
Height	4160mm
Footprint including fencing and conveying	7008 x 5085mm (LxW)
Max pallet height incl. pallet	2200mm
Min pallet height incl. pallet	250mm

### Conveying

Conveying height	450 - 650mm
Infeed conveyor with pallet centring	2164mm
Stretch conveyor	2700mm
Outfeed conveyor	2164mm



### Pallet

Pallet height minimum incl. pallet	250mm
Pallet height maximum incl. pallet	2200mm
Pallet size	800 x 1200mm
	1000 x 1200mm
	1040 x 1040mm
	1000 x 1300mm
	1220 x 1220 (48"x48")mm
Maximum overload each side	50mm
Maximum pallet weight	1500kg
Pallet material	Wood / Steel / Plastic

### Other requirements

Operating temperature	5° - 35°
Humidity	90% RH
Power supply	400V 50Hz 3phase
Total installed power	7.5kW

The specifications and design in this catalogue of this product will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.  
Actual colours may vary from the one shown here. Please check the availability of variants and colours with us.

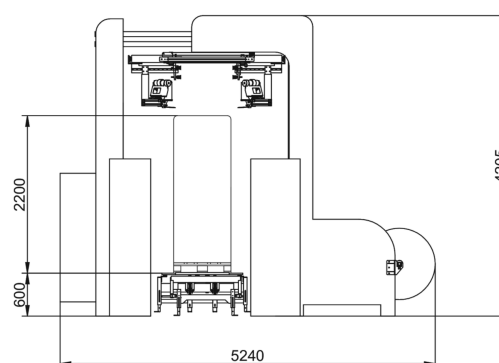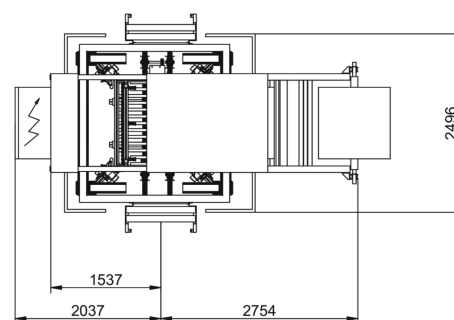

### Automated pallet conveying

We also offer turnkey pallet handling solutions to complement our Stretchhood Packaging machines using our standardized modules -

- Roller Conveyers
- Pallet Elevators
- Chain Conveyers
- Transfer Systems
- Roller Turntable
- Pallet Shuttles
- Chain Transfer Units



### AUTOMAG INDIA PRIVATE LIMITED

Regd. Office: Plot No 25, Survey No. 1,  
Aamchi Colony, Bavdhan, Pune 411 021, India.  
Tel.: +91 20 2295 1182 / 83 / 84 / 85 Fax: +91 20 2295 1187  
sales@automagindia.in | www.automagindia.com

Pune | New Delhi | Bangalore

